

MULTI-RECEIVER

With 8 bits dip switch, the user can make difference combination for difference remote brand. The brands selection show as table 1. In MULTI-RECEIVER, there're 2 independent channels. Each channel has independent learn button S1, S2 and L1,L2. The MULTI RECEIVER can be worked at the input AC 6-36V/DC 10-50V. The memory card can be removed from board for read, copy and backup. (CONTACT CAPACITY 24V/0.5A)

How to entry remote and Erase all remote

Entry one button or remote:

1. First, selecting the correct brands for remote will be entry by dip switch;
2. Press the learn button, the LED turn on. Press the button on the remote, the LED flashes 4 times, this button entry into the successfully.
3. Repeat step 2 for another button.
4. 2 channels works at same.

Erase all data in memory card:

Pressing and holding either learn button, the LED start flash. Keep holds pressing this button until the LED turn off.

All data in the memory card will be erased permanently.

Notice: Be carefully for erasing all data in the memory card. The data will be erased permanently and cannot be recovered.

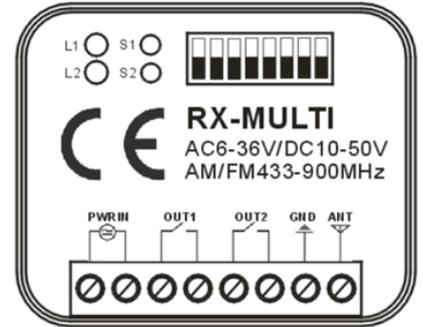


Table1: Brands' selection

ITEM	SELECTION DIP SWITC	BRAND	FREQ	NOTES
1		NICE FLORS	433.92 MHz	
2		MARANTEC	433.92 MHz	
3		Universal Fixed Code Código Fijo	433.92 MHz	Fixed Code
4		FAAC SLH Rolling Code	433.92 MHz	
5		Liftmaster	433.92 MHz	
6		Universal Rolling Open Code	433.92 MHz	Open Code
7		Liftmaster Rolling Code Billioncode	390 MHz	
8		FAAC SLH	868 MHz	
9		Prastel	433.92 MHz	
10		Sommer	868.80 MHz	
11		Sommer	434.4 MHz	
12		Liftmaster Rolling Code	868.30 MHz	

13		Clemsa Mastercode	433.92 MHz	
14		DITEC	315 MHz	
15		DITEC	390 MHz	
16		DITEC	433.92 MHz	
17		V2	315 MHz	
18		V2	390 MHz	
19		V2	433.92 MHz	
20		MARANTEC	868.30 MHz	
21		Aprimatic Encrypted Code	433.92 MHz	
22		Liftmaster Rolling Code	315 MHz	
23		Hormann Marantec Berner	868 MHz	

MULTI-RECEIVER

Pomocou 8 DIP prepínačov môže užívateľ nastaviť prijímač pre požadovanú značku vysielača. Kombinácie prepínačov pre jednotlivé značky vysielačov sú v tabuľke. Multi-receiver obsahuje dva nezávislé kanály. Každý kanál má tlačidlo pre naladenie vysielača, tlačidlo S1 a LED L1 pre 1. kanál, tlačidlo S2 a LED L2 pre 2. kanál.

Prijímač môže byť napájaný napätím AC 6-36V / DC 10-50V.

Prijímač obsahuje pamäťovú kartu, ktorú je možné vybrať pre kopírovanie a zalohovanie kódov. (Max. zaťaženie rele je 0,5 A

Uloženie vysielača do pamäti:


1. Nastavte DIP prepínače na značku vysielača, ktorý chcete naladiť.
2. Stlačte tlačidlo prvého kanálu na 2 sekundy, príslušná LED zostane svietiť. Stlačte tlačidlo na vysielači. Príslušná LED blikne 4 krát, ak uloženie vysielača prebehlo úspešne.

3. Druhý kanál funguje rovnako.

Vymazanie vysielača s pamäti:

Stlačte a držte stačené tlačidlo, LED dióda začne blikať. Držte tlačidlo, kým LED dióda prestane blikať. Týmto postupom vymažete všetky uložené vysielače.

Upozornenie: Budte opatrný pri mazaní pamäti prijímača, pretože dáta budú vymazané trvale a nie je ich možné obnoviť.

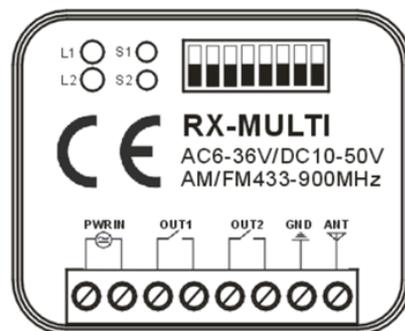

ITEM	SELECTION DIP SWITC	BRAND	FREQ	NOTES
1		NICE FLORS	433.92 MHz	
2		MARANTEC	433.92 MHz	
3		Universal Fixed Code Código Fijo	433.92 MHz	Fixed Code
4		FAAC SLH Rolling Code	433.92 MHz	
5		Liftmaster	433.92 MHz	
6		Universal Rolling Open Code	433.92 MHz	Open Code
7		Liftmaster Rolling Code Billioncode	390 MHz	
8		FAAC SLH	868 MHz	
9		Prastel	433.92 MHz	
10		Sommer	868.80 MHz	
11		Sommer	434.4 MHz	
12		Liftmaster Rolling Code	868.30 MHz	

13		Clemsa Mastercode	433.92 MHz	
14		DITEC	315 MHz	
15		DITEC	390 MHz	
16		DITEC	433.92 MHz	
17		V2	315 MHz	
18		V2	390 MHz	
19		V2	433.92 MHz	
20		MARANTEC	868.30 MHz	
21		Aprimatic Encrypted Code	433.92 MHz	
22		Liftmaster Rolling Code	315 MHz	
23		Hormann Marantec Berner	868 MHz	